


ELECTRIC

TILE

AMERICA

SUPERWHITE

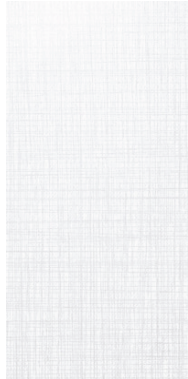


LINEN

Spanish Porcelain

2X2 Mosaic, 12x24

SHADE VARIATION

V1 - Uniform Appearance
Differences among pieces from the same production run are minimal.



WEAR CODE

Rated for all residential and commercial applications.

GRAPHITE




PERFORMANCE DATA

THICKNESS: 9.60 mm

Characteristics:	Norms:	Results
Water Absorption	ISO 10545-3	≤ 0.5%
PEI Abrasion Resistance (Glazed)	ISO 10545-7	5
Breaking Strength	ISO 10545-4	≥ 35 N/mm ²
Dynamic Coefficient of Friction Wet	AcuTest	0.43
Dimensions Range	ISO 10545-2	Conforms
Frost Resistance	ISO 10545-12	Frost Proof
Scratch Hardness	MOHS	8

BLACK

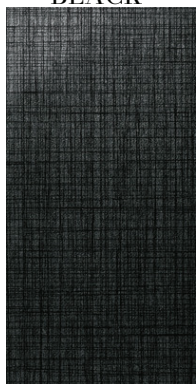

Notes:

Per ANSI standard A108.02,4.3.82, joints on 12x24 should not be staggered more than 1/3 the length of the tile. Always inspect materials prior to installations. Always mix 2-3 cartons at a time while installing to insure the best blend.

Book An Appointment



www.tileamerica.com