

CARAMEL



ESTATE

Italian Porcelain


2x2 Mosaics, 12x24 Matte & Glossy,
24x48 Matte & Glossy

TILE

AMERICA

SHADE VARIATION


V2 - Slight Variation
Clearly distinguishable differences in texture and/or pattern
within similar colors.



WEAR CODE

Class 5 Suitable for all Residential and Commercial Application.
Class 5 tiles are suitable for all applications including those with heavy traffic
and constant use. (i.e., Shopping Malls, Hospitals)

BLU

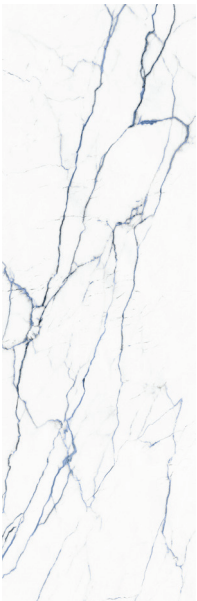

PERFORMANCE DATA

THICKNESS: 10 mm

Characteristics:	Norms:	Results
Water Absorption	ISO 10545-3	≤ 0.2 %
Abrasion Resistance I	SO 10545-7	5
Breaking Strength	ISO 10545-4	≥ 35 N/mm ²
Dynamic Coefficient of Friction	AcuTest	≥ 0.50 (Matte)
Dimensions Range	ISO 10545-2	Conforms
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	GA: GLA
Chemical Resistance - Low Concentration of Acids	ISO 10545-13	GA: GLA
Resistant Resistance to Stains	ISO 10545-14	Class 5
Crazing Resistance of Glazed Tiles	ISO 10545-11	Resistant

Notes:

Per ANSI standard A108.02,4.3.8.2; tiles longer than 15" should not be staggered more than 1/3 the length of the tile. Minimum recommended grout joint for this rectified tile series is 1/8". Always inspect materials prior to installations. Always mix 2-3 cartons at a time while installing to insure the best blend.

Book An Appointment



www.tileamerica.com

VERDE

