

TIE



# LINK

US Tile  
2x2 Mosaic, 12x24


# TILE

AMERICA

## SHADE VARIATION

Clearly distinguishable differences in texture and/or pattern within similar colors.

V2 - Slight Variation



BOLT



## WEAR CODE

Class 5 Suitable for all Residential and Commercial Application. Class 5 tiles are suitable for all applications including those with heavy traffic and constant use.

## PERFORMANCE DATA


THICKNESS: 9 mm

Characteristics:	Norms:	Results
Water Absorption	ASTM C373	0.50 %
Chemical Resistance	ASTM C650	Unaffected
Breaking Strength	ASTM C648	400 lbs
Dynamic Coefficient of Friction Wet	AcuTest	0.42
Dimensions	ASTM C499	Conforms
Facial Range of Thickness	ASTM C499	Conforms
Warpage (Diagonal)	ASTM C485	Conforms
Wedging	ASTM C502	Conforms
Frost Resistance	ASTM C1026	Frost Resistant
Scratch Hardness	MOHS	6

CHAIN



HOOK

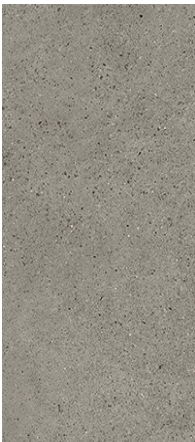

## Notes:

It is not recommended to stagger any tile longer than 18" more than 1/3 the length of the tile. Always inspect materials prior to installations. Always mix 2-3 cartons at a time while installing to insure the best blend.

Book An Appointment



www.tileamerica.com