

AVORIO



BEIGE




GRIGIO



ANTRACITE



NERO

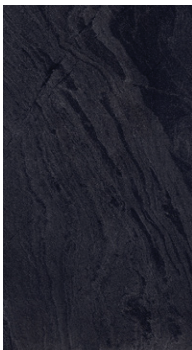

# ATLANTIC STONE

Italian Porcelain

6x24 Honed & Lappato, 12x24 Honed & Lappato, 2x2


Mosaics, 2.75x24 Honed & Lappato Bullnose

# TILE AMERICA

## SHADE VARIATION

V3 - Moderate Variation

While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example "that little bit of color" on one piece of tile may be the primary color on the next piece.



## WEAR CODE

Rated for all residential and commercial applications.

## PERFORMANCE DATA

THICKNESS 10 mm

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	ISO 10545-3	≤ 0.5%
Deep Abrasion	ISO 10545-6	< 175 mm <sup>3</sup>
PEI Abrasion Resistance (Glazed)	ISO 10545-7	NA
Breaking Strength	ISO 10545-4	≥ 35 N/mm <sup>2</sup>
Dynamic Coefficient of Friction Wet AcuTest		≥ 0.42 (matte)
Dimensions Range	ISO 10545-2	Conforms
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	Conforms
Chemical Resistance - Low Concentration of Acids & Bases	ISO 10545-13	Conforms
Thermal Shock Resistance	ISO 10545-9	Resistant
Resistance to Stains	ISO 10545-14	Cleanable
Crazing Resistance of Glazed Tiles	ISO 10545-11	Resistant

### Notes:

Per ANSI standard A108.02,4.3.82, joints on tiles longer than 18" should not be staggered more than 1/3 the length of the tile.

Always inspect materials prior to installations.

Always mix 2-3 cartons at a time while installing to insure the best blend.

Book An Appointment



www.tileamerica.com